


Vaisala Veriteq Multi-application Temperature Data Recorder Series 1016/1416

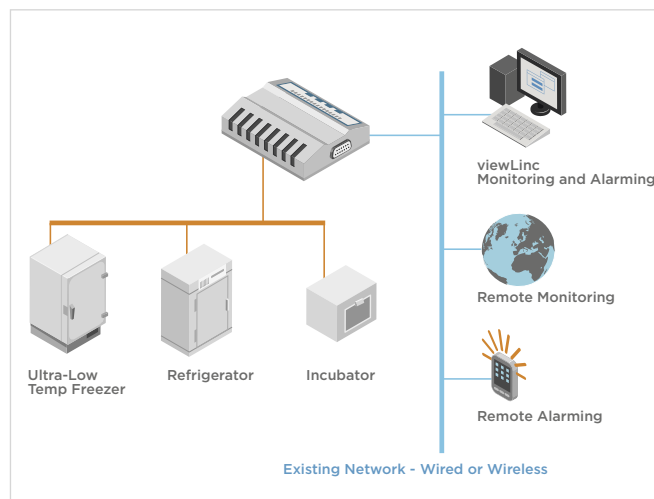

Features/Benefits

- Industry-leading precision and accuracy
- Real-time monitoring & alarming with viewLinc
- Easy connectivity to your existing network —wired or wireless
- Validation and continuous monitoring with the same device
- Superior alternative to chart recorders and hard-wired systems
- NIST-traceable, A2LA accredited calibration

MODEL NUMBERS & CHANNEL CAPACITY

- VL-1016-22 V
Two external channels for validatable applications
- VL-1416-44 V
Four external channels for validatable applications
- SP-1016-22 V
Two external channels
- SP-1416-44 V
Four external channels

Multi-application temperature data recorders monitor temperatures from four applications with one recorder—ultra low temperature freezers, freezer/refrigerators and incubators.

The VL-series data recorders, along with vLog™ reporting software, provide tamper-proof files and encrypted electronic records to meet 21 CFR Part 11 requirements. Also

available, the SP-series recorders for non FDA/GxP regulated industries allow you to easily download, display, analyze and report for any time period. Optional browser-based viewLinc™ Monitoring and Alarming software can be used with both VL and SP data recorders for 24/7, real-time alarm notification, monitoring and reporting.

Technical Data

General

Size	85 x 59 x 26 mm (3.4 x 2.3 x 1") 76 g (2.7oz)
Interfaces	RS-232 serial, USB, Ethernet, WiFi, PoE network interface available
Mounting	Magnetic strips, 3M Dual Lock™ Fasteners
PC Software	Snap-in connector locks provide secure probe connections vLog Graphing & Reporting Software viewLinc for continuous monitoring & alarming OPC Server to add Vaisala recorders to any OPC compatible monitoring system
Internal Clock	Accuracy ±1 min./month 0 °C to +50 °C (32 °F to +122 °F)
Electromagnetic Compatibility	FCC Part 15 and CE
Power Source	Internal 10-year lithium battery (Battery life specified with sample interval of 1 min. or longer)

Technical Data

Temperature Range & Accuracy

Sensor	"V" Range External Probe
Calibrated	-90 °C to +50 °C
Measurement Range	(-130 °F to +122 °F)
Operating Range	-95 °C to +70 °C
Range	(-139 °F to +158 °F)
Initial Accuracy*	±0.25 °C over -90 °C to +50 °C (±0.45 °F over -130 °F to +122 °F)
One Year Accuracy*	±0.35 °C over -90 °C to +50 °C (±0.63 °F over -130 °F to +122 °F)
Resolution	0.01 °C at +25 °C (0.02 °F at +77 °F)

1016 Series

Data Sample Capacity	68,600 16 bit samples
----------------------	-----------------------

1416 series

Data sample Capacity	101,375 16 bit samples
----------------------	------------------------

1016 and 1416 series

Memory type	non-volatile EEROM
Memory Modes	User-selectable rates from once every 10 seconds to once per day. (Battery life specified with sample interval of 1 min. or longer)
Sampling Rates	User-selectable rates from once every 10 seconds to once per day. (Battery life specified with sample interval of 1 min. or longer)

Recording Span: 1016-22V

NUMBER OF CHANNELS ENABLED		
SAMPLE INTERVAL	1	2
1 Minute	1.5 Months	23.8 Days
5 Minutes	7.6 Months	3.8 Months
15 Minutes	1.9 Years	11.5 Months
1 Hour	7.8 Years	3.9 Years

*Specification for external channels is for a probe calibrated to the specified to the specified channel of the data recorder, with the recorder at 0 °C to +50 °C (32 °F to +77 °F)

Recording Span: 1416-44V

NUMBER OF CHANNELS ENABLED				
SAMPLE INTERVAL	1	2	3	4
1 Minute	2.3 Months	1.1 Months	23.5 Days	17.6 Days
5 Minutes	11.3 Months	5.6 Months	3.7 Months	2.8 Months
15 Minutes	2.8 Years	1.4 Years	11.3 Months	8.5 Months
1 Hour	11.5 Years	5.7 Years	3.8 Years	2.8 Years

EPT-23N-XXV series and EPT-22W-10V series

Sensor	"V" Range External Probe
Operating Range	-95 °C to +70 °C (-139 °F to +158 °F)
Connector Color Code	Blue
Sensor Tip	Stainless Steel, Diameter: 3.2 mm (1/8"), Length: 38 mm (1.5") Sealed Teflon Tip Diameter: 3 mm (0.12"), Length: 28 mm (1.1")
Probe Length	"XX" denotes the length of the probe in feet. 3 m (10') and 7.6 m (25') lengths available
Cable Construction	2 mm (0.07") Diameter, Teflon coated cable

EPT-23N-XXV series

Sensor Tip	Stainless Steel, Diameter: 3.2 mm (1/8") Length: 38 mm (1.5")
------------	---

EPT-22W-10V series

Sensor Tip	Sealed Teflon Tip Diameter: 3 mm (0.12") Length: 28 mm (1.1")
------------	---

Temperature Probe Accessories

EPTTDB: Thermal Dampening Block, for use in refrigerators and freezers. Simulates a glycol bottle to reduce viewLinc alarms generated by opening and closing a door.

VAISALA

For more information, visit
www.vaisala.com or contact
us at sales@vaisala.com

Ref. B211042EN-A ©Vaisala 2010
This material is subject to copyright protection, with all
copyrights retained by Vaisala and its individual partners. All
rights reserved. Any logos and/or product names are trademarks
of Vaisala or its individual partners. The reproduction, transfer,
distribution or storage of information contained in this brochure
in any form without the prior written consent of Vaisala is strictly
prohibited. All specifications — technical included — are subject
to change without notice.

