

## HMW90 Series Humidity and Temperature Transmitters for High Performance HVAC Applications



The HMW90 Series Humidity and Temperature Transmitters are designed for demanding HVAC applications.

Wall-mounted Vaisala HMW90 Series HUMICAP® Humidity and Temperature Transmitters measure relative humidity and temperature in indoor HVAC applications, where high accuracy, stability, and reliable operation are required.

The flexible HMW90 series offers a variety of options and features. Transmitters include a display and a sliding cover with either an opening for the display or a solid front. Both analog and digital output options, including special scalings and calculated parameters, are available.

### Quick and Easy to Install

HMW90 series transmitters are quick and easy to install. The wiring is connected through the back plate and the electronics with the sensors can be snapped on easily after the wiring is complete. The transmitter is configured using dip switches, which are accessible when the enclosure is open.

### Digital Communication Brings Benefits

The introduction of digital (BACnet/Modbus) communication to field level devices brings many advantages. For example, all sensors can be centrally accessed and their performance can be easily monitored. Wiring is simple when multiple sensors are installed on the same bus. Sensors can be set up using standardized tools, and the system can be enlarged with additional sensors quickly and conveniently. In addition, parameters influencing measurements, such as pressure or site elevation, can be centrally set and updated.

### Choose from a Wide Variety of Calibration Options

On-site calibration and adjustment is exceptionally easy. The sliding cover exposes offset trimmers for one-point calibration without disturbing measurement. The display instantly indicates the effects of changes,

### Features/Benefits

- Both analog and digital output
- Easy installation, configuration, and field adjustment
- Humidity parameter options: relative humidity, dew point, mixing ratio, enthalpy, wet bulb temperature, dew point depression, and absolute humidity
- Full 0 ... 100%RH measurement range
- Up to  $\pm 1.7\%$  RH accuracy
- User exchangeable humidity and temperature module
- NIST traceable calibration (certificate included)
- Available in four colors

### BACnet in Brief

- A data communication protocol for Building Automation and Control networks
- Used in management, automation and field level communication
- ANSI/ISO/ASHRAE standard controlled by a standardization body
- Adds flexibility by allowing the integration of products and systems from different manufacturers

making it clear and convenient to make adjustments. A service port enables two-point calibration, using either a PC or the Vaisala HUMICAP® Hand-Held Humidity and Temperature Meter HM70. HMW90 series transmitters include a user-exchangeable measurement module, which can be ordered as a spare part. Calibration services are available through all Vaisala Service Centers.

# Technical Data

## Models

TMW92	T-only	2-wire, current output
TMW93	T-only	3-wire, voltage output
TMW90	T-only	configurable analog output model
HMW92	RH+T	2-wire, current output
HMW92D	RH+T	2-wire, current output with display
HMW93	RH+T	3-wire, voltage output
HMW93D	RH+T	3-wire, voltage output with display
HMW90	RH+T	Configurable analog/digital model
HMW95	RH+T	Digital (BACnet, Modbus) model
HMW95D	RH+T	Digital (BACnet, Modbus) model with display

## Performance

### RELATIVE HUMIDITY

Measurement range	0 ... 100 %RH, non-condensing	
Accuracy		
Temperature range	+10 ... +40 °C (+50 ... +104 °F)	
0 ... 90 %RH		±1.7 %RH
90 ... 100 %RH		±2.5 %RH
Temperature range	-5 ... +10 °C, +40 ... +55 °C (+23 ... +50 °F, +104 ... +131 °F)	
0 ... 90 %RH		±3 %RH
90 ... 100 %RH		±4 %RH
Stability in typical HVAC applications	±0.5 %RH/year	
Humidity sensor	Vaisala HUMICAP® 180R	

### TEMPERATURE

Measurement range	-5 ... +55 °C (+23 ... +131 °F)	
Accuracy		
+20 ... +30 °C (+68 ... +86 °F)		±0.2 °C (±0.36 °F)
+10 ... +20 °C, +30 ... +40 °C (+50 ... +68 °F, +86 ... +104 °F)		±0.3 °C (±0.54 °F)
-5 ... +10 °C, +40 ... +55 °C (+23 ... +50 °F, +104 ... +131 °F)		±0.5 °C (±0.90 °F)
Temperature sensor	Digital temperature sensor	

## Operating Environment

Operating temperature range	-5 ... +55 °C (+23 ... +131 °F)
Storage temperature range	-30 ... +60 °C (-22 ... +140 °F)
Electromagnetic compliance	EN61326-1, Industrial Environment

## Spare Parts and Accessories

Humidity and Temperature Module	HTM10SP
Temperature Module (for T-only models)	TM10SP
Connection cable for HM70 hand-held meter	219980
USB cable for PC connection	219690

## Mechanics

IP class	IP30
Standard housing color	White (RAL9003*)
Optional housing colors (configurable models only)	Black (RAL9005*) Grey (RAL7035*) Light Ivory (RAL1015*)
Housing material	ABS/PC, UL-V0 approved
Output connector	Screw terminals max. wire size 2 mm <sup>2</sup> (AWG14)
Service port connector	4-pin M8
Weight	155 g

\*RAL code is only indicative with potential small variations in color shade

## Inputs and Outputs

### Current output models

Outputs	2 x 4 ... 20 mA, loop powered
Loop resistance	0 ... 600 Ω
Supply voltage	20 ... 28 VDC at 500 Ω load 10 ... 28 VDC at 0 Ω load
Isolation between output channels	500 VDC

### Voltage output models

Outputs	2 x 0...5 V or 2 x 0...10 V
Load resistance	10 kΩ min.
Supply voltage	18 ... 35 VDC, 24 VAC ±20 % 50/60 Hz
Max. current consumption	12 mA max. with relay 25 mA

Relay	1 pc (max. 50 VDC, 500 mA)
-------	----------------------------

### Digital models

Supply voltage	18 ... 35 VDC, 24 VAC ± 20% 50/60 Hz
Max. current consumption (with 120 Ω termination)	30 mA at 24 VDC

Output type	RS-485 (galvanic isolation, 1.5 kV)
RS-485 end of line termination	Enable with jumper, 120 Ω
Supported protocols	Selectable by DIP switch

### BACnet MS/TP

Operating mode	Selectable Master/Slave
Address range, master mode	0 ... 127
Address range, slave mode	128...255


### Modbus RTU

Address range	0 ... 247
---------------	-----------

Service port	RS-485 line for temporary service use
--------------	---------------------------------------

## Dimensions in mm (h x w x d)

133 x 81 x 30

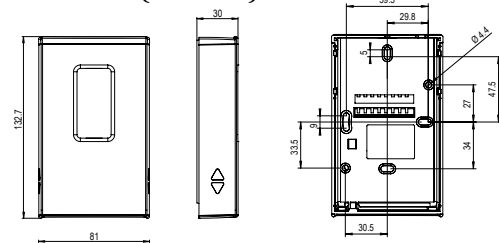

# VAISALA

www.vaisala.com

Please contact us at  
[www.vaisala.com/requestinfo](http://www.vaisala.com/requestinfo)



Scan the code for  
more information

Ref. B211183EN-C ©Vaisala 2013

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

